

EVALUATION OF THE IONIC AIR PURIFICATION EFFICIENCY BY THE ELECTRICAL LOW PRESSURE IMPACTOR (ELPI)


Byung Uk Lee, Mikhail Yermakov, Sergey A. Grinshpun

Center for Health-Related Aerosol Studies, Dept. of Environmental Health, University of Cincinnati, Cincinnati, OH, USA

INTRODUCTION AND OBJECTIVE






- The ion emission has been shown to reduce the concentration of airborne dust particles and microorganisms in indoor environments. The aerosol particles, charged unipolarly by the emitted ions, repel and migrate toward the surfaces, which results in their rapid deposition. Those ion emitters, which meet health standards (e.g., do not generate ozone above the established thresholds) have been incorporated in commercial air purification devices. The ionic air purifiers are being increasingly used in indoor environments.
- In this study, three ionic air purifiers, VI-2500, ASI50MM (+) positive, and ASI50MM (-) negative (Wein Products Inc., Los Angeles, CA), were evaluated with respect to their indoor air cleaning efficiency.
- Since some airborne biological agents are primarily represented by submicrometer and micrometer particles (e.g., isolated airborne viruses range from 0.04 to about 0.2-0.3 μm and bacterial spores are about 1 μm in their equivalent optical/aerodynamic diameter), the targeted particle size range was 0.04 to 2 μm .

METHODS

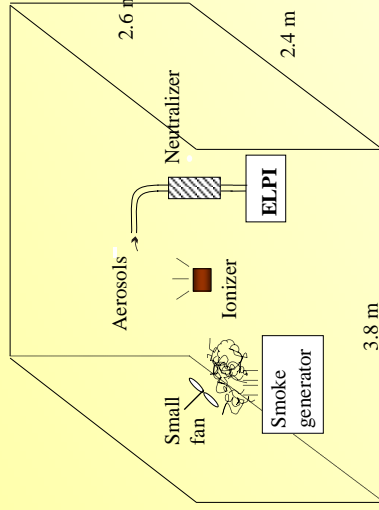

- Indoor test chamber of $\sim 25 \text{ m}^3$.
- Smoke particle generator.
- Electrical low pressure impactor (ELPI, TSI Inc./Dekati Ltd, St. Paul, MN).
- The particle-size-specific concentrations recorded in 12 channels of the ELPI, $d_a = 0.04$ to 10 μm .
- The particle charge distribution measurement.
- The ELPI sampling inlet is $\sim 0.2 \text{ m}$ from the purifier.
- Air temperature = $23 \pm 10^\circ\text{C}$.
- Relative humidity = $42 \pm 9\%$.

Wein ionic air purifiers	VI-2500	ASI50MM (+) positive	ASI50MM (-) negative
Ion density	2 million (-) ions / cm^3	1.5 million (+) ions / cm^3	1.5 million (-) ions / cm^3
Measurement distance from the device	4 ft (1.22 m)	2 ft (0.61 m)	2 ft (0.61 m)

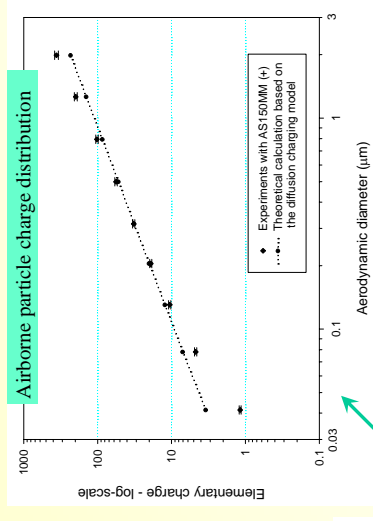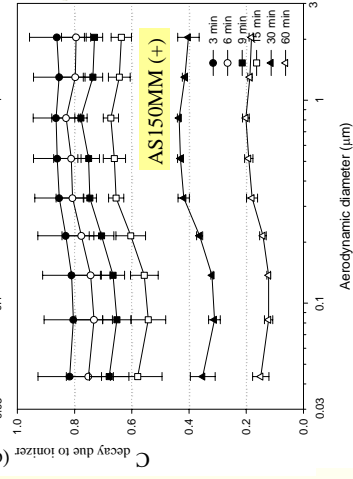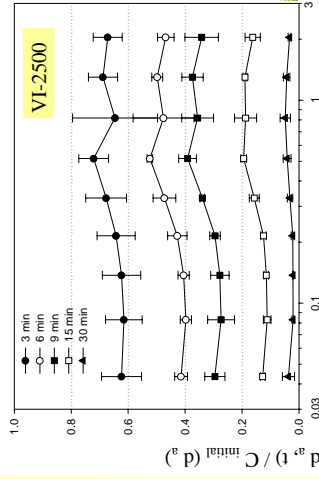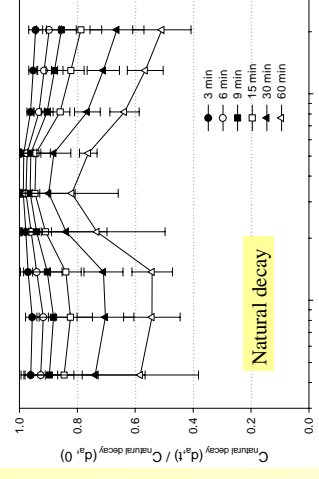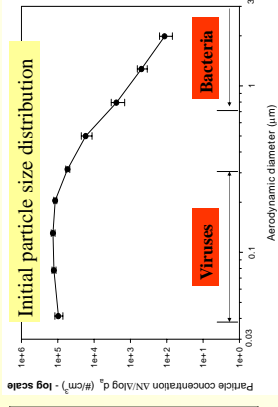

Original charges of particles generated in our experiments were very low (less than 1 elementary charge per particle, on average). When an ionic air purifier operated, the air particles exhibited considerable positive or negative electric charges, depending on the polarity of the purifier (e.g. the average charge of 1 μm particles reached $\sim 10^2 e^-$ in 3 minutes when the ASI50MM (+) operated). The experimental results are in good agreement with the theoretical data obtained using the diffusion charging model.

Ionic air purifiers demonstrate significant air purifying efficiency. A 30-minute operation of the VI-2500 in a room-size chamber removed about 97% of 0.1 μm particles and about 95% of 1 μm particles from the air, in addition to the natural decay effect. A 60-min operation of the ASI50MM (+) and ASI50MM (-) removed about 83% and 84% of 0.1 μm particles and about 79% and 83% of 1 μm particles from the air, respectively.

Acknowledgements - This work was supported in parts by the Wein Products Inc. (Los Angeles, CA) and the Post-doctoral Fellowship Program of Korea Science & Engineering Foundation (KOSEF).

Byung Uk Lee: leebu@leebt.ac.kr, leeb4@ucmail.uc.edu
Mikhail Yermakov: yermakm@ucmail.uc.edu
Sergey A. Grinshpun: sergey.grinshpun@uc.edu